PCT WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : B66F 11/04 — A1

(11) International Publication Number: WO 99/33744

(43) International Publication Date: 8 July 1999 (08.07.99)

(21) International Application Number: PCT/GB98/03520

(22) International Filing Date: 25 November 1998 (25.11.98)

(30) Priority Data:
9727258.7 23 December 1997 (23.12.97) GB

(71) Applicant *(for all designated States except US)*: VITEC GROUP, PLC [GB/GB]; Western Way, Bury St. Edmunds, Suffolk IP33 3TB (GB).

(72) Inventor; and

(75) Inventor/Applicant *(for US only)*: LINDSAY, Richard, Arthur [GB/GB]; 2 St. Mary's Close, Gislingham, Eye, Suffolk IP23 8HW (GB).

(74) Agent: BOULT WADE TENNANT; 27 Furnival Street, London EC4A 1PQ (GB).

(81) Designated States: AU, CN, DE, GB, JP, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published
With international search report.

(54) Title: CAMERA MOUNTINGS FOR TV/VIDEO CAMERAS

(57) Abstract

A camera mounting for a TV/video camera, comprising a base (11) having a datum point, and a counter/balanced arm assembly (10) mounted on the base at one end (15) thereof and having a platform (21) for carrying a camera at the other end thereof for supporting the camera platform for movement in three orthogonal axes with respect to the datum. Transducer means (35, 36, 37) are provided for determining movement of the camera platform with respect to the datum point in said three axes to provide information regarding the location of the camera for purposes such as controlling movement of a virtual reality image to be combined with a real image as seen by the camera as the camera is moved with respect to the datum.

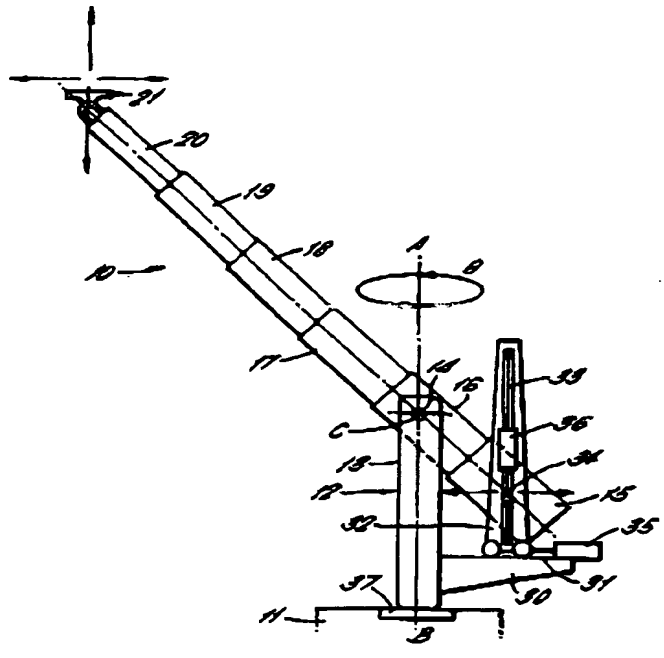

EL302699645US

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

CAMERA MOUNTINGS FOR TV/VIDEO CAMERAS

This invention relates to camera mountings for TV/video cameras and is particularly although not exclusively applicable to the camera mountings of our European Patent Publication No. 0725758 and our UK Patent Publication No. 2163720.

This invention provides a camera mounting for a TV/video camera, comprising a base having a datum point, a counter-balanced arm assembly mounted on the base at one end thereof and having a platform for carrying a camera at the other end thereof for supporting the camera for movement in three orthogonal axes with respect to the datum and transducer means for determining movement of the camera platform with respect to the datum point in said three axes to provide information regarding the location of the camera for purposes such as controlling movement of a virtual reality image to be combined with a real image as seen by the camera as the camera is moved with respect to the datum.

More specifically, the arm assembly is mounted on the base for rotation about a vertical axis through the datum point, the arm assembly providing movement of the camera platform in two orthogonal axes in any plane containing said vertical axis, and said transducer means comprising first means for determining rotation of the arm about said vertical axis and further means for determining movement of the camera mounting in said plane with respect to the datum point.

In one arrangement according to the invention,

the arm assembly may be telescopic and may be mounted on the base to pivot in a vertical plane about a horizontal axis.

In an alternative construction according to the invention, the arm assembly may comprise a first arm pivotally mounted on the base about a horizontal axis and a second arm pivotally mounted on the first arm about a parallel horizontal axis for supporting the camera platform.

In any of the above arrangements, the arm assembly may have a control point connected to the arm assembly so that movement of the control point with respect to the datum point in the vertical plane containing the arm and said vertical axis is directly proportional to the movement of the camera platform and said further transducer means is arranged to monitor movement of the control point with respect to the datum point.

More specifically, the transducer means for monitoring movement of the control point may comprise separate transducers for responding to movement of the control point with respect to the datum point in vertical and horizontal directions.

In the case where the arm assembly is telescopically extendable and pivotable about a horizontal axis, the transducer means may be arranged to monitor extension of the arm and pivotal movement of the arm about said horizontal axis to monitor the position of the camera platform in a vertical plane with respect to said datum.

In the case where the arm assembly has first and second pivoted arms, said further transducer means may

be arranged to monitor pivotal movement of the first arm about said horizontal axis with respect to the base and pivotal movement of the second arm with respect to the first arm to monitor the position of the camera platform with respect to said datum.

The following is a description of some specific embodiments of the invention, reference being made to the accompanying drawings in which:

Figure 1 is a diagrammatic view of a camera mounting for a TV/video camera embodying a telescopic arm mounting and one arrangement of transducers for determining movement of the camera platform;

Figure 2 is a view of a similar camera mounting embodying a telescopic arm mounting with an alternative arrangement of transducers for determining movement of the camera platform;

Figure 3 is a diagrammatic view of a camera mounting having a pantograph arm assembly and arrangement of transducers for determining movement of the camera platform; and

Figure 4 is a similar view to Figure 3 showing a further arrangement of transducers for determining the movement of the camera platform.

Referring firstly to Figure 1 of the drawings, there is shown a camera mounting for a television or video camera. A detailed description of the arm is set out in our European Patent Publication No. 0725758 to which reference should be made. Briefly the mounting comprises a counter-balanced telescopic arm indicated generally at 10, mounted on a base indicated generally at 11. An upwardly extending bifurcated column 12 is mounted for rotation on the base about a vertically extending axis A-B. The bifurcated column has spaced arms 13 having inwardly extending trunnions 14

at their upper ends to receive and support the arm 10 for tilting about a horizontal axis indicated at C.

The telescopic arm comprises six elements or stages 15 to 20 which are slidably engaged one within the other to move between the extended position shown in Figure 1 and a retracted position which is not shown. A mechanism interlinks the successive stages of the arm so that when the arm is extended all the stages extend by the same amounts with respect to each other and when contracted, contract by the same amounts with respect to each other. The arm is pivotally mounted on the trunnion 14 on the intermediate element 16 next to end element 15 for rotation of the arm about the horizontal axis C defined by the trunnions.

The outer end stage 20 of the arm carries a platform 21 to receive and support a TV or video camera in a mounting which provides usual pan and tilt movements. The other end stage 15 of the arm contains a fixed weight (not shown) intended to balance the arm whether in extended or "telescoped" mode. The mounting thus permits manual (or "motorised") movement of the platform (and thereby the camera) in three axes with respect to an origin or datum point on the base and also normal pan and tilt movement of the camera on the platform 21.

The column 12 has a horizontally extending platform 30 located to one side of the column and disposed below the inner end stage 15 of the arm. A guideway 31 is mounted on the platform and a wheeled carriage 32 is constrained to run on the guideway to support the carriage for horizontal movement along the guideway. The carriage is formed with a vertically

extending slot 33 in which a pin 34 on the inner end stage 15 of the arm is constrained to slide so that as the arm tilts about the horizontal axis C, the pin will slide up and down the slot and at the same time the carriage 32 will move along the guideway. Rams may be provided for moving the carriage along the guideway and for moving the pin vertically up and down the slot to provide "motorised" movement of the camera in the two axes of movement, that is parallel to axis A-B and towards and away from axis A-B.

To determine the movement and thereby the position of the camera platform with respect to the origin or datum of the axis A-B at the base of the camera mounting, one linear transducer 35 is mounted on the platform 30 and is coupled to the carriage 32 to determine horizontal movement of the carriage, a second linear transducer 36 is mounted vertically on the carriage to determine movement of the pin and a third transducer 37 is mounted on the base to determine rotation of the pedestal about the vertical axis A-B with respect to the base.

The pin on the arm provides a control point, movement of which in the horizontal and vertical directions will be proportional to the corresponding movements of the camera platform in horizontal and vertical directions. The constant of proportionality will be the number of moving stages "N" of the arm between the axis C and the platform 30.

Let m= the horizontal co-ordinate of the control point in the plane of the arm;

n= the vertical co-ordinate of the control point in the plane of the arm; and

θ = the angle of rotation of the arm about the vertical axis A-B.

Then the co-ordinates of the camera platform position relative to an origin on the vertical axis A-B will be as follows :

N.m.cos.θ; N.m.sin θ; N.n.

The information relating to the camera platform position may be fed to monitoring equipment which merges a virtual reality background with a foreground as seen by the camera. Transducers are also provided on the camera pan and tilt mechanisms for determining pan and tilt movement of the camera. The virtual reality background image is moved in accordance with movement of the camera mounting and the camera pan and tilt mechanisms as the camera is moved in viewing the foreground so that the virtual reality background moves appropriately with the foreground.

Figure 2 shows an alternative arrangement in which one rotary transducer 38 measures the angle α of the arm 10 to the horizontal and a second, linear transducer 39 measures the extension of one section of the arm with respect to another. This extension is proportional to the extension of the entire telescopic arm, the constant of proportionality being the number of stages of the arm between the axis C and the platform 30. The extension together with the angle α provides a set of co-ordinates for the camera position in a plane containing the arm and axis A-B. A third rotary transducer is placed on the axis A-B for measuring θ, the angle of orientation of the arm about the vertical axis.

The co-ordinates of the camera platform position are then defined as follows :

$(Nx+y) \cos \alpha \cos \theta;$

$(Nx+y) \cos \alpha \sin \theta;$

$(Nx+y) \sin \alpha.$

Figures 3 and 4 show an application of the invention to the balanced camera mounting embodying a pantographic arm as described and illustrated in our UK Patent Publication No. 2163720. The camera mounting comprises a base 50 mounted for rotation about a vertical axis indicated at A-B. A counter-balanced pantographic mechanism 51 is mounted on the base comprising an upwardly extending first parallelogram linkage 52 pivotally mounted about horizontal axes on the base and a second parallelogram linkage 53 connected by a common link 54 to the upper end of the first linkage at one end and having a camera support platform 55 at its other end. A counter-balancing mechanism indicated at 56 is connected to the parallelogram linkages and has a control point P constrained to move horizontally and vertically in proportion to the movement of the platform 55. Transducers determine the horizontal and vertical extent of movement of the control point P in a similar manner to the arrangement of Figure 1.

Movement of the control point P in the horizontal and vertical directions is proportional to the movement in the directions in the plane of the arm of the camera platform. The constant of proportionality "k" is related to the length of the sections of the linkages of the arm.

Two linear transducers measure the horizontal and

vertical or cartesian co-ordinates "m" and "n" of the point P relative to an origin on vertical axis A-B. A third rotary transducer is placed on axis A-B to measure θ, the angle of orientation of the arm about the vertical axis. The co-ordinates of the camera position are then as follows :

$K.m.\cos\theta$;

$K.m.\sin\theta$;

$K.n.$

Figure 4 shows a further arrangement to Figure 3 with an alternative arrangement of the transducers for determining the movement of the arm. Two rotary transducers are placed at the hinge points of the arm (as shown). Transducer 61 monitors the angle β which arm section 52 makes with the vertical. Transducer 62 monitors the angle α which arm section 52 makes with arm section 53. A third rotary transducer 63 is placed on the axis A-B to measure θ, the angle of orientation of the arm from a datum on the base.

The three angles α, β and θ can be used to find the co-ordinates of the position of the camera platform which are as follows :

$[(L_1 \sin\beta + L_2 \sin(\beta+\alpha)] . \cos\theta$;

$[(L_1 \sin\beta + L_2 \sin(\beta+\alpha)] . \sin\theta$;

$L_1 \cos\beta + L_2 \cos(\beta+\alpha)$

CLAIMS

1. A camera mounting for a TV/video camera, comprising a base having a datum point, a counter-balanced arm assembly mounted on the base at one end thereof and having a platform for carrying a camera at the other end thereof for supporting the camera platform for movement in three orthogonal axes with respect to the datum and transducer means for determining movement of the camera platform with respect to the datum point in said three axes to provide information regarding the location of the camera for purposes such as controlling movement of a virtual reality image to be combined with a real image as seen by the camera as the camera is moved with respect to the datum.

2. A camera mounting as claimed in claim 1, wherein the arm assembly is mounted on the base for rotation about a vertical axis through the datum point, the arm assembly providing movement of the camera platform in two orthogonal axes in any plane containing said vertical axis, and said transducer means comprising first means for determining rotation of the arm about said vertical axis and further means for determining movement of the camera platform in said plane with respect to the datum point.

3. A camera mounting as claimed in claim 2, wherein, the arm assembly is telescopic and is mounted on the base to pivot in a vertical plane about a horizontal axis.

4. A camera mounting as claimed in claim 2, wherein the arm assembly comprises a first arm pivotally mounted on the base about a horizontal axis

and a second arm pivotally mounted on the first arm about a parallel horizontal axis for supporting the camera platform.

5. A camera mounting as claimed in any of claims 2 to 4, wherein the arm assembly has a control point connected to the arm assembly so that movement of the control point with respect to the datum point in the vertical plane containing the arm and said vertical axis is directly proportional to the movement of the camera platform, and said further transducer means is arranged to monitor movement of the control point with respect to the datum point.

6. A camera mounting as claimed in claim 5, wherein the transducer means for monitoring movement of the control point comprise separate transducers for responding to movement of the control point with respect to the datum point in vertical and horizontal directions.

7. A camera mounting as claimed in claim 3, wherein the further transducer means are arranged to monitor extension of the arm and pivotal movement of the arm about said horizontal axis to monitor the position of the camera platform in a vertical plane with respect to said datum.

8. A camera mounting as claimed in claim 4, wherein said further transducer means are arranged to monitor pivotal movement of the first arm about said horizontal axis with respect to the base and pivotal movement of the second arm with respect to the first arm to monitor the position of the camera platform with respect to said datum.

FIG. 1.

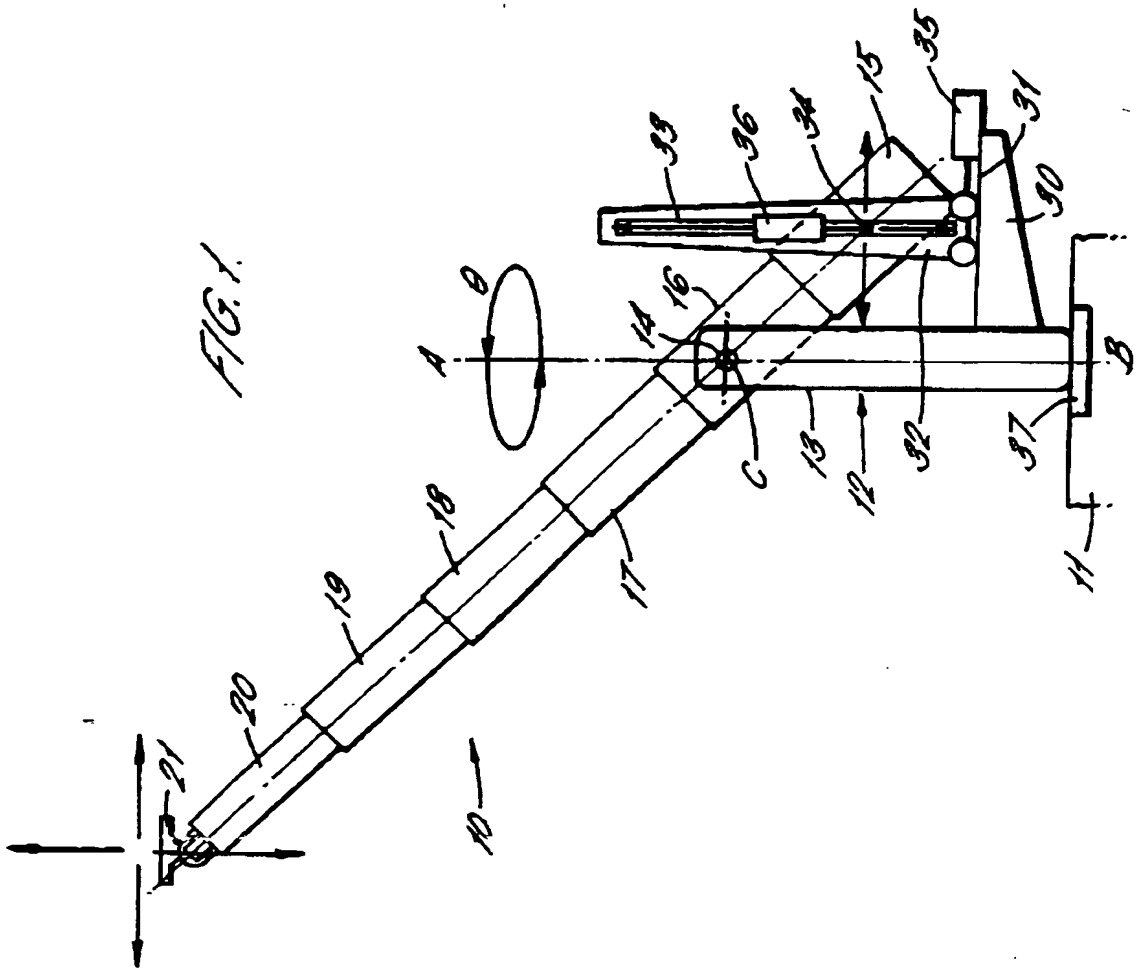

FIG. 2.

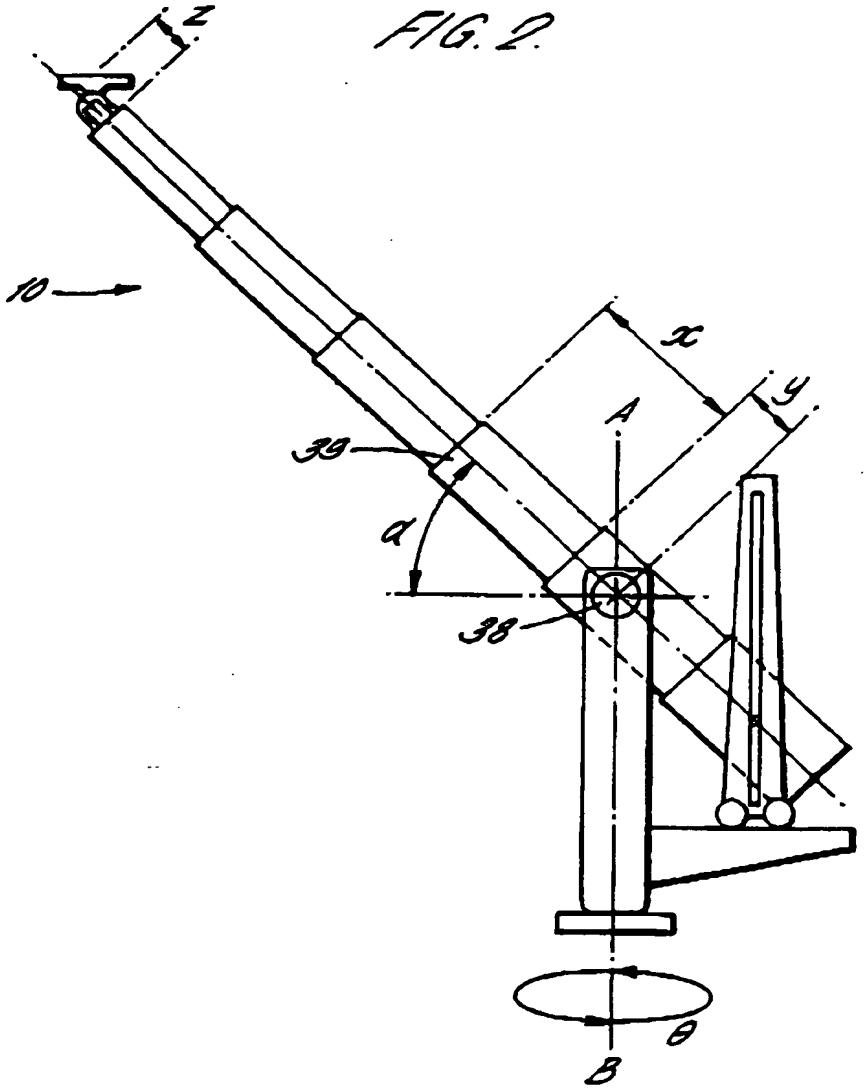

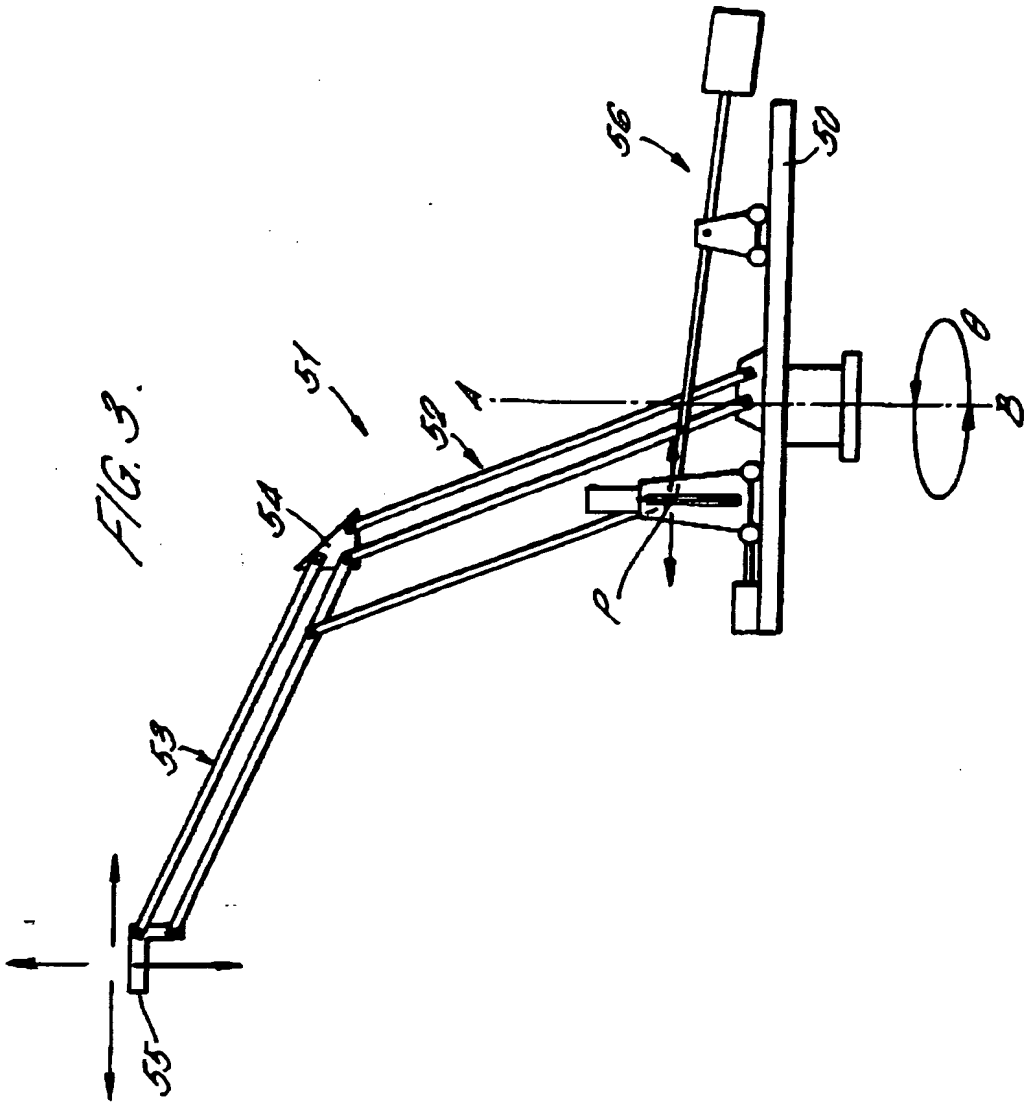

FIG. 3.

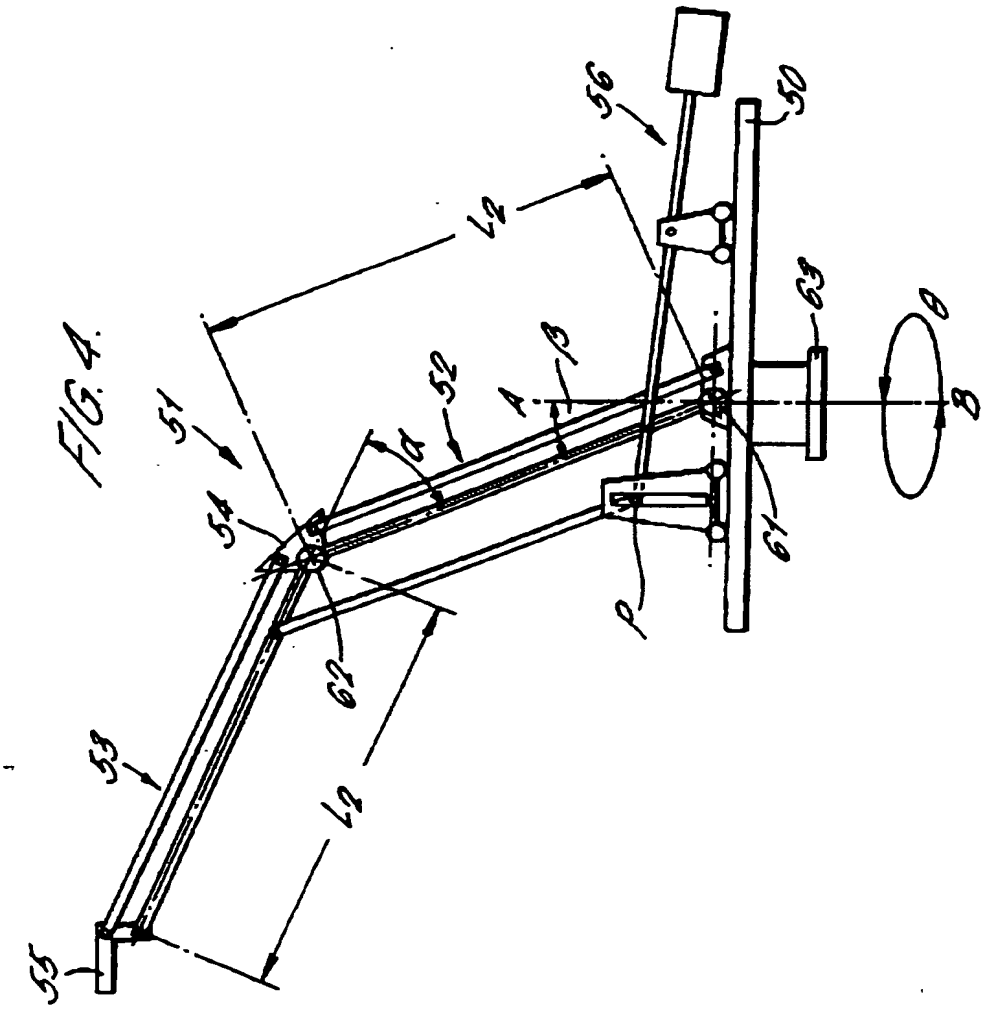

FIG. 4.

INTERNATIONAL SEARCH REPORT

09/582278

Interna... Application No
PCT/GB 98/03520

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 B66F11/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 B66F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y	DE 94 08 384 U (MAGICMOVE GESELLSCHAFT FÜR VISUELLE EFFEKTE) 4 August 1994 see page 1, paragraph 1 - page 2, paragraph 3 see page 7, paragraph 1 - page 17, paragraph 4	1,2 3
Y A Y	WO 94 12424 A (VINTEN GROUP PLC) 9 June 1994 see abstract; figure 1 & EP 0 725 758 A cited in the application	3 5
X Y	FR 2 264 298 A (MAGICAM) 10 October 1975 see the whole document	1 4

-/--

[X] Further documents are listed in the continuation of box C.

[X] Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
19 February 1999	26/02/1999

Name and mailing address of the ISA	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Van den Berghe, E

Form PCT/ISA/210 (second sheet) (July 1992)

EL302699645US

INTERNATIONAL SEARCH REPORT

Internat Application No
PCT/GB 98/03520

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	GB 2 163 720 A (W VINTEN) 5 March 1986 cited in the application see abstract; figure 1	4
X	WO 92 02871 A (DIGITAL ARTS FILM & TELEVISION PTY) 20 February 1992 see abstract; figures 1-5,10 see page 27, paragraph 3	1,2
A	DE 33 22 852 A (FILM-GERÄTE-VERLEIH SCHMIDLE & FITZ) 10 January 1985	
A	EP 0 263 573 A (CHAPMAN) 13 April 1988	
A	FR 2 554 800 A (GRANGE) 17 May 1985	

1

INTERNATIONAL SEARCH REPORT

Information on patent family members

Internat[illegible] Application No
PCT/GB 98/03520

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
DE 9408384	U	04-08-1994	NONE		
WO 9412424	A	09-06-1994	AU	5572194 A	22-06-1994
			DE	69322104 D	17-12-1998
			EP	0725758 A	14-08-1996
			EP	0823396 A	11-02-1998
			US	5697757 A	16-12-1997
FR 2264298	A	10-10-1975	US	3902798 A	02-09-1975
			AU	7909075 A	16-09-1976
			CA	1017612 A	20-09-1977
			DE	2511502 A	18-09-1975
			GB	1496016 A	21-12-1977
			JP	51002416 A	10-01-1976
GB 2163720	A	05-03-1986	AU	574218 B	30-06-1988
			AU	4658485 A	06-03-1986
			DE	3530292 A	13-03-1986
			FR	2569925 A	07-03-1986
			JP	1745970 C	25-03-1993
			JP	4032000 B	28-05-1992
			JP	61123365 A	11-06-1986
			NL	8502370 A	01-04-1986
			SE	455639 B	25-07-1988
			SE	8503944 A	24-02-1987
			US	4657220 A	14-04-1987
WO 9202871	A	20-02-1992	AU	661825 B	10-08-1995
			US	5457370 A	10-10-1995
			CA	2088071 A	09-02-1992
			JP	5509181 T	16-12-1993
DE 3322852	A	10-01-1985	NONE		
EP 263573	A	13-04-1988	US	4899097 A	06-02-1990
			BE	1000020 A	17-11-1987
			JP	63092291 A	22-04-1988
FR 2554800	A	17-05-1985	NONE		

PATENT COOPERATION TREATY

09/582278

PCT

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

Applicant's or agent's file reference	FOR FURTHER ACTION	See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)
48663001/IA9248		
International application No.	International filing date *(day/month/year)*	Priority date *(day/month/year)*
PCT/GB98/03520	25/11/1998	23/12/1997
International Patent Classification (IPC) or national classification and IPC		
B66F11/04		
Applicant		
VITEC GROUP, PLC et al.		

1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.

2. This REPORT consists of a total of 5 sheets, including this cover sheet.

   ☒ This report is also accompanied by ANNEXES, i.e. sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).

   These annexes consist of a total of 5 sheets.

3. This report contains indications relating to the following items:

   - I ☒ Basis of the report
   - II ☐ Priority
   - III ☐ Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
   - IV ☐ Lack of unity of invention
   - V ☒ Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations suporting such statement
   - VI ☐ Certain documents cited
   - VII ☐ Certain defects in the international application
   - VIII ☐ Certain observations on the international application

Date of submission of the demand	Date of completion of this report
23/06/1999	29.03.00
Name and mailing address of the international preliminary examining authority: European Patent Office D-80298 Munich Tel. +49 89 2399 - 0 Tx: 523656 epmu d Fax: +49 89 2399 - 4465	Authorized officer Koob, M Telephone No. +49 89 2399 2080

Form PCT/IPEA/409 (cover sheet) (January 1994)

EL302699645US

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No. PCT/GB98/03520

I. Basis of the report

1. This report has been drawn on the basis of (*substitute sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to the report since they do not contain amendments.*):

Description, pages:

2-8	as originally filed			
1,1a	as received on	26/01/2000	with letter of	24/01/2000

Claims, No.:

1-8	as received on	26/01/2000	with letter of	24/01/2000

Drawings, sheets:

1/4-4/4	as originally filed

2. The amendments have resulted in the cancellation of:

- ☐ the description, pages:
- ☐ the claims, Nos.:
- ☐ the drawings, sheets:

3. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed (Rule 70.2(c)):

4. Additional observations, if necessary:

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No. PCT/GB98/03520

V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

1. Statement

Novelty (N)	Yes:	Claims	1-8
	No:	Claims	
Inventive step (IS)	Yes:	Claims	
	No:	Claims	1-8
Industrial applicability (IA)	Yes:	Claims	1-8
	No:	Claims	

2. Citations and explanations

see separate sheet

INTERNATIONAL PRELIMINARY EXAMINATION REPORT - SEPARATE SHEET

International application No. PCT/GB98/03520

Reference is made to the following documents:

D1: WO 94 12424
D2: FR-A-2 264 298
D3: GB-A-2 163 720

V. Reasoned statement

1. The subject-matter of **claim 1** does not involve an inventive step (Article 33(3) PCT).

1.1 **D1** discloses a camera mounting comprising:
- a basis (11)
- an arm assembly (10)
  - counte balanced (23)
  - swivel about a vertical axis (29)
  - a platform (32)
  - relatively movable components (24-28)
  - movement of the platform in three orthogonal axes (20, 29, 24-28)

1.2 **Claim 1** differs from **D1** by:
a) the basis having a datum point
b) three separate transducer means for determining movement of the arm components
c) monitoring means for determining position of the platform

1.3 The problem to be solved by the present invention may therefore be regarded as to provide information regarding the location of the camera for purposes such as controlling movement of a virtual reality image to be combined with a real image as seen by the camera as the camera is moved with respect to the datum.

1.4 **D2** discloses a camera mounting for movement of the camera in three orthogonal axes by the steered wheels (fig. 15, elem. 375, 381, 382, 383) of a carriage, a pivot arm (fig. 14, elem. 45) about a horizontal axis and a camera-platform (fig.

14+18, elem. 48) which pivots about a vertical and a horizontal axis. Each movement is surveyed by a separate sensor (feature **b** of paragraph 1.2; fig. 17, elem. 396, fig. 16, elem. 388, fig. 14, elem. 393, fig. 21, elem. 435, fig. 18, elem. 420) to determine with the aid of a computer (feature **c** of paragraph 1.2; fig. 1, elem. 56) the position of the camera (p. 19, l. 32 - p. 21, l. 9) with respect to a reference point (feature **a** of paragraph 1.2; p. 4, l. 21). This movement is reproduced by the mounting of a background camera and corresponds to the problem outlined in paragraph 1.3.

1.5 Concerning features **a**, **b** and **c** of paragraph 1.2:

a) The simplest transformation of coordinates to calculate the position of the camera is achieved by choosing the reference at a stationary point preferably including one or more axes of the movement. Herewith the choice of the datum point lying on the basis is obvious.

b) **D2** is teaching to provide at each axis of movement a separate sensor. As the movement is realised in **D1** by a swivel movement about a vertical axis and relative movement between arm components, it is obvious to place the sensors there.

c) The computer of **D2** corresponds to the monitoring means and is determining the position of the camera.

To solve the problem mentioned in paragraph 1.3 it is therefore obvious to combine **D1** and **D2**.

2. The subject-matter of the dependent **claims 2 to 8** does not involve an inventive step (Article 33(3) PCT):

Claim 2 see paragraph 1.5 **a**

Claim 3 see **D1**

Claim 4 see **D3**

Claims 5 and 6 see **D1**, p. 12, l. 30 - p. 13, l. 5

Claims 7 and 8 see paragraph 1.5 **b**

CAMERA MOUNTINGS FOR TV/VIDEO CAMERAS

This invention relates to camera mountings for TV/video cameras and is particularly although not exclusively applicable to the camera mountings of our European Patent Publication No. 0725758 and our UK Patent Publication No. 2163720.

WO/A-94/12424 discloses a counterbalanced load carrier comprising a multi-stage telescopic arm. One stage adjacent one end of the arm is mounted for rotation by a vertical axis on a mobile base. The adjacent end stage of the arm carries a counterweight and the end stage at the other end of the arm carries a support for a TV or video camera. The respective stages of the arm are interconnected by a cable or like mechanism to extend and retract together maintaining a fixed ratio between the radius of the payload support and the horizontal axis and the counterweight and the horizontal axis so that the arm remains counterbalanced throughout its range of extension and retraction. The cable mechanism also acts on the camera support on said end section of the arm to maintain the support horizontal throughout the range of tilting of the arm. An additional counterbalancing force can be applied at control point on end stage, the control point being constrained to move in a vertical guideway located on a horizontal moveable carriage to follow the vertical/horizontal movement of the end stage of the arm.

FR-A-2264298 discloses a camera mounting for movement of a camera in third orthogonal axes by steered wheels of a carriage, a pivot arm about a horizontal axis and a camera platform which pivots about a vertical and a horizontal axis. Each movement is monitored by a separate sensor to determine, with

the aid of a computer, the position of the camera with respect to a reference point.

This invention provides a camera mounting for a TV-video camera, comprising a base, a counter-balanced arm assembly pivotally mounted on the base at one end thereof to swivel about a vertical axis and having a platform for carrying a camera at the other end thereof, the arm assembly having relatively movable components to permit, with said swivelling of the assembly about said vertical axis, movement of the platform in three orthogonal axes; wherein the base of the mounting has a datum point, the mounting has three separate transducer means for determining swivel movement of the arm about said vertical axis and relative movement between said arm components in a plane containing said vertical axis, and monitoring means are provided for determining, from the movements detected by said transducers, the position of the camera platform with respect to the datum point in said three axes to provide information regarding the location of the camera for purposes such as controlling movement of a virtual reality image to be combined with a real image as seen by the camera as the camera is moved with respect to the datum.

More specifically, the arm assembly is mounted on the base for rotation about a vertical axis through the datum point, the arm assembly providing movement of the camera platform in two orthogonal axes in any plane containing said vertical axis, and said transducer means comprising first means for determining rotation of the arm about said vertical axis and further means for determining movement of the camera mounting in said plane with respect to the datum point.

In one arrangement according to the invention

CLAIMS:

1. A camera mounting for a TV/video camera, comprising a base, a counter-balanced arm assembly (10) pivotally mounted on the base (11) at one end thereof to swivel about a vertical axis (A-B) and having a platform (21) for carrying a camera at the other end thereof, the arm assembly having relatively movable components (16 to 20; 52 to 54) to permit, with said swivelling of the assembly about said vertical axis, movement of the platform in three orthogonal axes; characterised in that the base (11) of the mounting has a datum point, the mounting has three separate transducer means for determining swivel movement of the arm about said vertical axis (A-B) and relative movement between said arm components in a plane containing said vertical axis, and monitoring means are provided for determining, from the movements detected by said transducers, the position of the camera platform with respect to the datum point in said three axes to provide information regarding the location of the camera for purposes such as controlling movement of a virtual reality image to be combined with a real image as seen by the camera as the camera is moved with respect to the datum.

2. A camera mounting as claimed in claim 1, wherein the arm assembly (10) is mounted on the base (11) for rotation about a vertical axis (A-B) through the datum point, the arm assembly providing movement of the camera platform in two orthogonal axes in any plane containing said vertical axis, and said transducer means comprising first transducer means for determining rotation of the arm about said vertical axis and further transducer means for determining movement of the camera platform in said plane with

respect to the datum point.

3. A camera mounting as claimed in claim 2, wherein the arm assembly (10) is telescopic and is mounted on the base (10,12) to pivot (14) in a vertical plane about a horizontal axis (C).

4. A camera mounting as claimed in claim 2, wherein the arm assembly (10) comprises a first arm (52) pivotally mounted on the base (11) about a horizontal axis and a second arm (53) pivotally mounted on the first arm about a parallel horizontal axis for supporting the camera platform (55).

5. A camera mounting as claimed in any of claims 2 to 4, wherein the arm assembly (10) has a control point (34, P) connected to the arm assembly so that movement of the control point with respect to the datum point in the vertical plane containing the arm and said vertical axis is directly proportional to the movement of the camera platform, and said further transducer means is arranged to monitor movement of the control point with respect to the datum point.

6. A camera mounting as claimed in claim 5, wherein the transducer means for monitoring movement of the control point (34, P) comprise separate transducers for responding to movement of the control point with respect to the datum point in vertical and horizontal directions.

7. A camera mounting as claimed in claim 3, wherein the further transducer means are arranged to monitor extension of the arm and pivotal movement of the arm about said horizontal axis to monitor the position of the camera platform in a vertical plane

with respect to said datum.

8. A camera mounting as claimed in claim 4, wherein said further transducer means are arranged to monitor pivotal movement of the first arm about said horizontal axis with respect to the base and pivotal movement of the second arm with respect to the first arm to monitor the position of the camera platform with respect to said datum.

: 13724: GCB: CAP: FURNDOCS

Copy for the Elected Office (EO/US)

PCT/GB98/03520

09/582278

2613

PATENT COOPERATION TREATY

PCT

From the INTERNATIONAL BUREAU

To:

BOULT WADE TENNANT
Verulam Gardens
70 Gray's Inn Road
London WC1X 8BT
ROYAUME-UNI

RECEIVED
NOV 13 2000
TECH CENTER 2700

NOTIFICATION OF THE RECORDING OF A CHANGE

(PCT Rule 92bis.1 and Administrative Instructions, Section 422)

Date of mailing (day/month/year) 23 May 2000 (23.05.00)	
Applicant's or agent's file reference 48663001/IA9248	**IMPORTANT NOTIFICATION**
International application No. PCT/GB98/03520	**International filing date** (day/month/year) 25 November 1998 (25.11.98)

1. The following indications appeared on record concerning:

[ ] the applicant [ ] the inventor [X] the agent [ ] the common representative

Name and Address	State of Nationality	State of Residence
BOULT WADE TENNANT 27 Furnival Street London EC4A 1PQ United Kingdom		
	Telephone No. 0171 430 7500	
	Facsimile No. 0171 405 1916	
	Teleprinter No.	

2. The International Bureau hereby notifies the applicant that the following change has been recorded concerning:

[ ] the person [ ] the name [X] the address [ ] the nationality [ ] the residence

Name and Address	State of Nationality	State of Residence
BOULT WADE TENNANT Verulam Gardens 70 Gray's Inn Road London WC1X 8BT United Kingdom		
	Telephone No. 44 20 7430 7500	
	Facsimile No. 44 20 7831 1768	
	Teleprinter No.	

3. Further observations, if necessary:

4. A copy of this notification has been sent to:

[X] the receiving Office
[ ] the International Searching Authority
[X] the International Preliminary Examining Authority
[ ] the designated Offices concerned
[X] the elected Offices concerned
[ ] other:

The International Bureau of WIPO **34, chemin des Colombettes** **1211 Geneva 20, Switzerland**	Authorized officer C. Cupello
Facsimile No.: (41-22) 740.14.35	Telephone No.: (41-22) 338.83.38

PATENT COOPERATION TREATY

From the INTERNATIONAL BUREAU

PCT

NOTIFICATION OF ELECTION

(PCT Rule 61.2)

To:

Assistant Commissioner for Patents
United States Patent and Trademark Office
Box PCT
Washington, D.C.20231
ÉTATS-UNIS D'AMÉRIQUE

in its capacity as elected Office

Date of mailing (day/month/year) 11 August 1999 (11.08.99)	
International application No. PCT/GB98/03520	**Applicant's or agent's file reference** 48663001/IA9248
International filing date (day/month/year) 25 November 1998 (25.11.98)	**Priority date** (day/month/year) 23 December 1997 (23.12.97)
Applicant LINDSAY, Richard, Arthur	

1. The designated Office is hereby notified of its election made:

[X] in the demand filed with the International Preliminary Examining Authority on:

23 June 1999 (23.06.99)

[ ] in a notice effecting later election filed with the International Bureau on:

2. The election [X] was

[ ] was not

made before the expiration of 19 months from the priority date or, where Rule 32 applies, within the time limit under Rule 32.2(b).

The International Bureau of WIPO **34, chemin des Colombettes** **1211 Geneva 20, Switzerland**	Authorized officer S. Mafla